

Server-based Computing Protocols & Applications

- + Microsoft RDP, Citrix ICA, Tarantella AIP
- + X-Windows (X11) and VNC
- + Integrated Mozilla Firefox Browser
- + Local ShellScript support, ThinPrint®
- + Terminal Emulation, Telnet and SSH
- + NFS/Samba support

Platform Specifications

- + 1Ghz Via C3 CPU w/MMX & 3DNow
- + 256MB DDR RAM
- + 256MB Flash
- + Netvoyager Lithium™ Operating System

Video Platform

- + Intel® 852GM 2D/3D graphics card
- + Resolution upto 1024 x 768
- + Colour depth upto 32-bits
- + 15" LCD display area (80°H, 70°V)
- + Resistive touch screen
- + Brightness : 450cd/m²
- + Pixel pitch : 0.297mm

Audio

- + Full 16-bit audio, internal speaker, Line-out socket

Network Features

- + Auto-sensing 10/100Mbps Fast Ethernet
- + TCP/IP, DNS & DHCP support
- + Multiple master ICA browser support
- + Citrix ICA load balancing support
- + Point-to-Point Protocol (PPP)
- + VPN Support
- + Wireless (b/g) with built-in antenna

Connectivity Ports

- + 2 x RJ-45 ethernet port, 2 x USB 2.0 ports, 1 x PS/2
- + 1 x VGA, 2 x RS-232, 2 x RS232/485

Server OS Compatibility and Support

- + Microsoft .Net Server ready
- + Microsoft Windows 2000
- + Microsoft Windows NT4 Server Terminal Server
- + Citrix Winframe, Metaframe, XP and Presentation Server
- + Tarantella Enterprise 3 Server
- + Unix Variants (Linux, Solaris)
- + Support for OS compliant USB floppy and flash drives

Configuration and Management

- + Remote device shadowing
- + Kiosk or desktop mode
- + Built-in remote management
- + Enterprise management w/Netvoyager InFocus
- + Multi-language keyboard support
- + Configurable session auto-login
- + Multi-session, Multi-protocol, Multi-window support

Electrical Features

- + External universal 110-240V AC power supply
- + 16v ~ 28v over-voltage fuse protection
- + 60W max power consumption

Physical Features

- + Various optional mounting solutions
- + VESA mounting compatible
- + Weight: 6.5kg
- + Dimensions: D 64.9mm x W 396mm x H 312mm


Warranty Support

- + 1 year return to base
- + Premium support contracts available

Environmental Specifications

- + Operating Temperature Range: -20°C to +55°
- + Humidity Range: 10% to 95% @ 40°C non-condensing
- + Operating Vibration: 3G, 5 ~ 500Hz random
- + Front Bezel: IP65, NEMA4 rugged protection
- + CE, RoHS and WEEE compliance

Product Dimensions

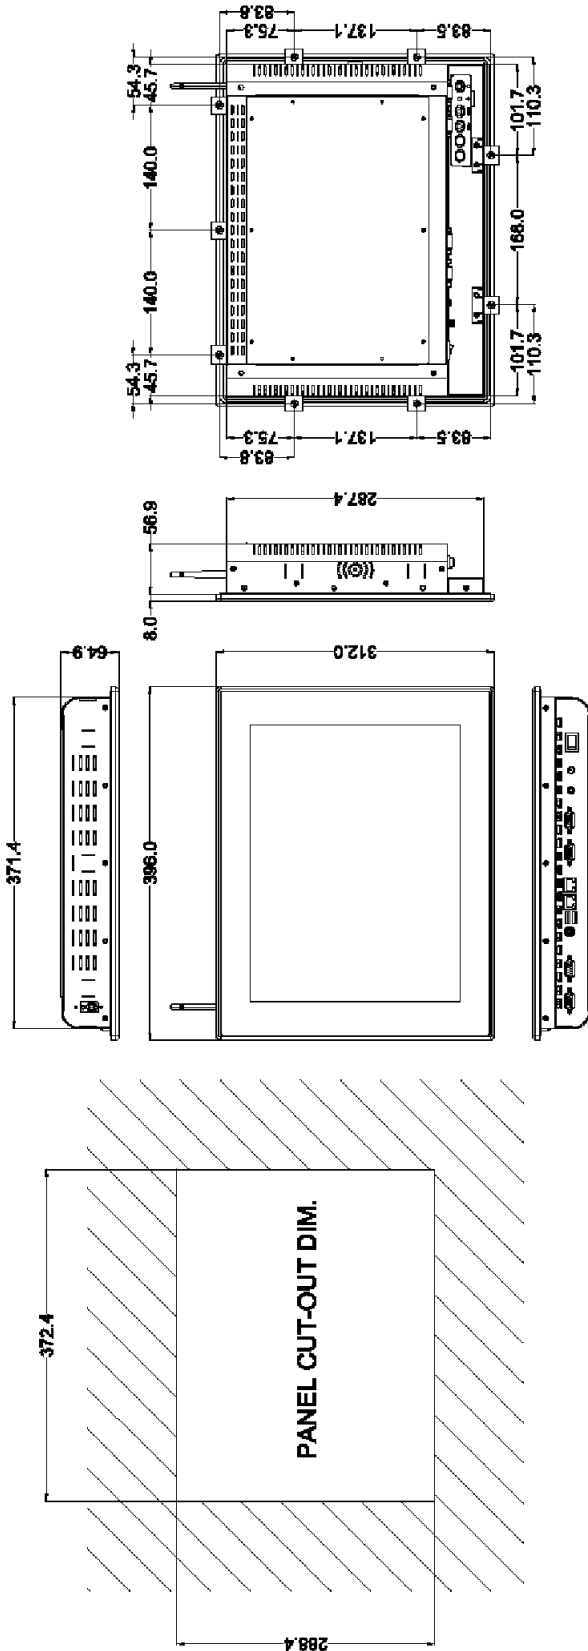

Product Rear View

